






MAX BLANK
HIGH QUALITY

OLDENBURG

wood

Technical specifications of the architectural stove:

measurements (cm)	width	height	depth
stove	85	60	52
combustion chamber	61	24	27
fire glass	59,5	30	
fire door	85	47	
flue pipe connection Ø 15 to → or ↑			
height to mid pipe rear socket or lateral			47,5
height to pipe socket above			63,5
outside air connection Ø 10 to → or ↓			
height to mid connection horizontal			16,5
depth to mid connection vertical			20
total weight	chamotte bricks	heat accumulator	
203 kg	30 kg	-	
data for	wood stove		
nominal heat output	6,7 kW		
output range	8 - 5 kW		
efficiency	80%		
heating capability*	70 - 350 m ³		
amount of fuel	2,0 kg / h		
fire duration	- 4 h		
heat release	- 6 h		
flue gas flow volume	6,6 g / s		
exhaust °C (nozzle)	296 °C		
min/max feed press.	12 / 15 Pa		
CO (13%/O ₂) [mg/m ³]	1244		
CO (13%/O ₂) [%]	0,100		
dust (13%/O ₂) [mg/m ³]	21		
NO _x (13%/O ₂) [mg/m ³]	163		
CxHy (13%/O ₂) [mg/m ³]	66		
wall distance, rear	4 cm		
wall distance, side	6 cm		
distance to the front	100 cm		

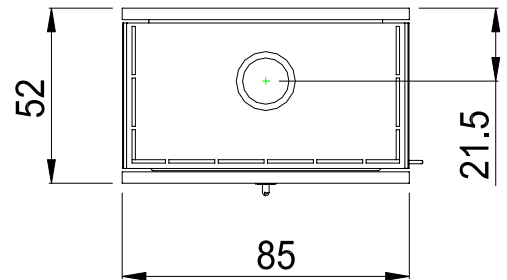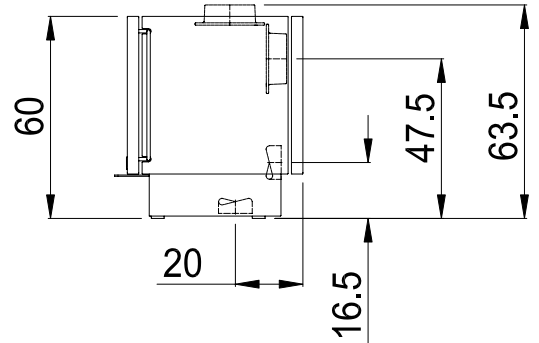

Fulfils the latest standards in burning wood and wood-briquettes (please see applicable standards).

Please check the instruction manual for this wood burning stove.

Suitable for multiple chimneys.




* depending on stove location in the living area, room isolation, height of the room and amount of fuel

emission value at 50 cm flue pipe outlet

Subject to alterations; errors including printer's errors.

Our specialised stove builders and retailers will assist you with practical advice.

The architectural stove, model Oldenburg

ENR	model	delivery time	
360-2031	<p>Oldenburg ↑ →</p> <ul style="list-style-type: none"> • stove body anthracite • door facet stainless steel • door hinge at the left hand side • intake air connector at bottom <p>technical possibilities: - Please specify when ordering! -</p> <p>door hinge </p> <p>smoke connection </p> <p>further connection options available for an additional charge</p> <p>smoke connection </p>	4	
accessories for the architectural stove			
<p>Outside air connection is prepared: Be sure to specify when ordering: outside air connection horizontal or vertical (is included in scope of delivery)</p> <p>For other connection accessories, please see list of accessories.</p>			
special features of the architectural stove, model Oldenburg			
<ul style="list-style-type: none"> • patented self-locking door handle • attractive horizontal architecture • wide combustion chamber of over 60 cm • wall distance of 4 cm *** • adjustable feet for a stable set up • with patented, self-cooling door handle made of stainless steel • smoke flue also possible to put on the side • more special features and extras at the last pages <p>The inspection of an certified inspector is required. The rear of the stove will be heated up to 65 °C according to the manual (flue pipe upwards).</p>			